



Avoid over bending.

The repetitive bending of a hose to a radius smaller than the radius listed in the specification tables for corrugated hose will result in premature hose failure. Always provide sufficient length to prevent over bending and to eliminate strain on the hose.

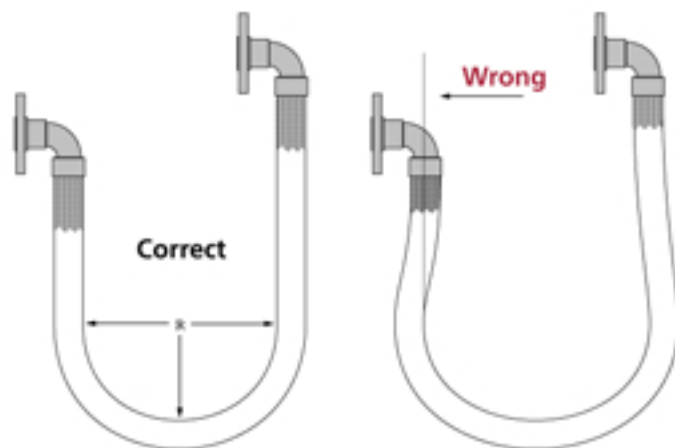

Avoid sharp bends.

Utilize sound geometric configurations that avoid sharp bends, especially near the end fittings of the assembly.

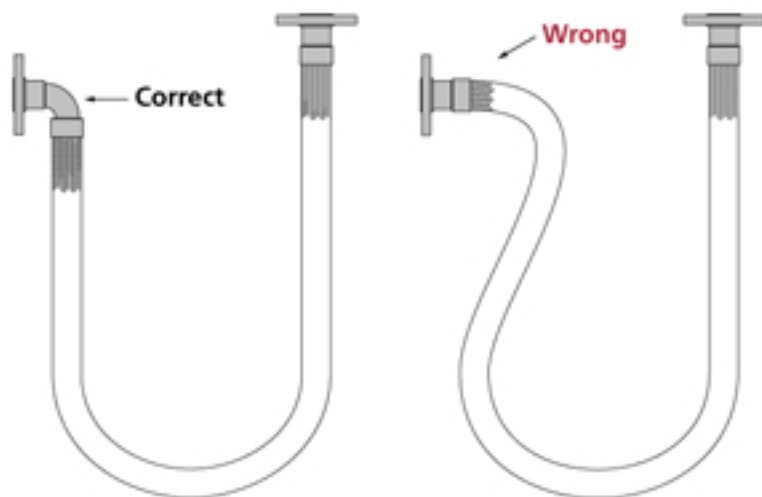

Provide support.

When installing the assembly in a horizontal loop, provide support for the arms to prevent the hose from sagging.

